

Cellular Parametric Test

GPRS, EDGE and AMR options - 6113 EDGE Base Station Test Set

AEROFLEX
A passion for performance.



- Field portable, easy to use, fully integrated GPRS, EDGE and AMR test capability for GSM 850, 900, 1800 and 1900 MHz base station transmitter and receiver testing
- Comprehensive first line, second line and engineering testing of complete GSM, GPRS, EDGE and AMR base station performance
- Installation/commissioning, maintenance and fault-finding test capability
- Support for the major base station vendors
- Unique A-bis control functions to maximize test coverage

The 6113 has long been regarded as the world's leading test tool for base station installation and maintenance - in particular, with its unique receiver test capability. With the widespread adoption of GPRS, EDGE and AMR networks, these options extend the test capability of the 6113 to match the evolution of GSM networks and allow network operators to continue to have full confidence in the quality of their networks and identify potential problems before subscribers are adversely affected - both during initial network rollout and then during ongoing planned maintenance.

The GPRS, EDGE and AMR options are designed for use by network operators' engineering teams, BTS servicing and refurbishment centers. The comprehensive test coverage makes the 6113 suitable for use in evaluating GPRS, EDGE and AMR base stations prior to deployment and then for ongoing detailed performance evaluation, feature testing and detailed fault-finding of persistent or difficult to solve problems.

AMR Overview


As with any other type of base station, the transmitter and receiver paths of AMR-capable base stations need to be appropriately tested as part of ongoing preventive maintenance. In addition, new test requirements to ensure that rate-adaptation is working correctly are introduced.

For the transmitter and receiver paths, tests such as maximum output power are unaffected by AMR and can be tested using standard GSM full rate traffic channels. Other tests are changed so that the AMR specific elements of the base station are adequately tested; in particular those that include AMR codecs in the signal path such as bit error rate (BER) and frame erasure rate (FER).

The key features of the AMR option are:

- Addition of key transmitter and receiver AMR measurements
- Full rate and half rate AMR channels
- Combined traffic/signalling BER test

GPRS/EDGE Overview

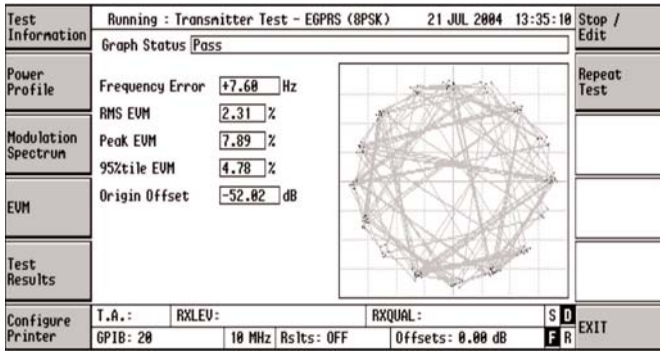

GPRS and EDGE technology introduce new channel types, and for EDGE, 8-PSK modulation in addition to GSM's and GPRS' GMSK modulation. This alters the RF specifications and performance of the base station and with it brings a corresponding need to test these new features. The GPRS and EDGE options support the following channel types:

- CS-1 to CS-2 GMSK modulation (GPRS)
- MCS-1 to MCS-4 GMSK modulation (EDGE)
- MCS-5 to MCS-9 8-PSK modulation (EDGE)

When selecting GPRS or EDGE test options, the standard 6113 tests and pass/fail limits are automatically adjusted to match the appropriate test specifications. Additional tests, such as error vector magnitude (EVM) and receiver BLER are also added for testing 8-PSK signals.

GPRS and EDGE test set parametric performance is equivalent to the standard 6113 test set product specification. The Cell Integrity and Live Test options are not available for GPRS or EDGE.

Base Station Manufacturers Supported

The following BTS manufacturers' specific A-bis software is supported on the 6113 for GPRS, EDGE and AMR. If support for other manufacturers is required, please contact us.

- Alcatel (EDGE only)
- Ericsson
- Nokia
- Nortel
- Siemens

Software Support

The GSM standards and base station software continue to evolve as new features are introduced. In order to maintain compatibility between the 6113 and the base station under test, annual software support contracts are offered. The software support contract also provides minor enhancements to the 6113 functionality as and when released and access to the Aeroflex Helpdesk for technical support and assistance in using the 6113.

Upgrades and Ordering Information

GPRS can be added to new or existing test sets by ordering option 313 for new units and option 313R for existing units.

For new test sets, or to upgrade a test set delivered after 1st January 2004, please specify option 440 for EDGE or option 451 for AMR. No hardware upgrade is required for these options.

Older units with serial numbers higher than 2000, can be upgraded to EDGE and AMR but the unit will need to be returned to Aeroflex for a hardware upgrade. The hardware is identical for both EDGE and AMR. Please specify the following options to upgrade an existing test set:

- Options 440R and 451 to upgrade to EDGE and AMR
- Option 440R to upgrade to EDGE only
- Option 450 to upgrade to AMR only

If a unit has previously been upgraded to EDGE, AMR can be added as a software only upgrade. For units that already have EDGE, AMR can be added by ordering option 451.

The appropriate software support options (S440 for EDGE, S450 for AMR) must be ordered together with the EDGE and AMR options.

Units with serial numbers 1600-1999 may be suitable for upgrade. However, the 6113 will need to be returned to Aeroflex for inspection prior to accepting any order to determine whether the unit can be upgraded. The EDGE and AMR upgrade options are not available for units with serial numbers below 1600.

SPECIFICATION

TRANSMITTER TEST

Cell Control Channel Generation Tests

Checks generation of the Cell Control Channels by the BTS.

Transmitter Test

Checks transmitted signal power level, modulation spectrum, frequency, burst profile and phase error (GMSK) or EVM (8PSK) are within defined specification.

Allows user to view transmitted burst profile, modulation spectrum and phase error (GMSK) or EVM/IQ Constellation (8PSK).

Transmitter BER/BLER Test

Checks the basic baseband signal processing (Static Layer 1) functions on the downlink (BTS to MS) side of the BTS.

DOWNLINK POWER

Control Test

Checks that the transmitted TCH signal conforms to the defined average output power level of the downlink power increments.

RECEIVER TESTS

Receiver BER/BLER Test

Checks the basic baseband signal processing (Static Layer 1) functions on the uplink (MS to BTS) side of the BTS, and checks that the BER and BLER is acceptable at Reference Input Sensitivity level (GMSK & 8-PSK).

Absolute Sensitivity Test

Measures the actual sensitivity of the transceiver by finding the threshold at which the measured BER and BLER deteriorates beyond the specified limits (GMSK & 8-PSK).

RACH & PRACH Test

Checks the performance of the BTS in detecting and reporting the presence of Random Access Channel Requests (RACH & PRACH).

RX Level Test

This test checks the performance of the BTS in measuring and reporting the level of the received signal (RX LEV) on the uplink side of the BTS.

RX Quality Test

This test checks the performance of the BTS in measuring and reporting the quality of the received signal (RX QUAL) on the uplink side of the BTS, updated in line with any changes. Adding new BTS software versions or updating existing software features of the 6113 can be performed quickly and easily in the field via memory card, IEEE488 or RS232 interface.

Combined Signaling/Traffic BER Test

Simultaneous measurement of BER on both signaling and AMR channels. This test is useful for diagnosing dropped calls that occur even when AMR maintains good speech quality.

8-PSK MEASUREMENTS

Frequency Error

$< \pm 20 \text{ Hz} + \text{Freq. Std.}$

RMS EVM

1% accuracy at 7% EVM

EVM Range

0 to 25% Nominal

Power Profile

>45 dB dynamic range

Modulation Spectrum

>49 dB dynamic range

Note: GSM measurement performance remains the same as the standard 6113 test set.

(See 6113 Datasheet for details)

FUNCTIONAL TESTS

Configure BTS Test

Brings the BTS to a fully 'configured' state, ready for testing.

Re-set BTS Test

Re-sets the BTS to a 'non-configured' state.

INTERACTIVE TEST MODE

Multi-mode

All the major measurements are run continuously. The operator can vary the majority of the test parameters without terminating the test. Test results are displayed simultaneously and are continuously updated.

SPECIAL FUNCTIONS MODE

Signal Generator Mode

This mode allows the 6113 to operate as a signal generator that can transmit a variety of GSM / EDGE structured signals and other signals. No signal monitoring is performed in this mode.

Power Meter Mode

This mode allows the 6113 to operate as a power meter to monitor the power on a nominated channel, or to indicate the channel that contains maximum power.

CHANNEL TYPES

CHANNEL TYPES

GSM: EFR, FR, HR, GSM data 2.4-14.4kbit/s

GPRS: CS-1 to CS-2*

EGPRS: MCS-1 to MCS-4 GMSK

MCS-5 to MCS-9 8-PSK

AMR full-rate:

4.75, 5.15, 5.90, 6.70, 7.40, 7.95, 10.2, 12.2 kbit/s*

AMR half-rate:

4.75, 5.15, 5.90, 6.70, 7.40 kbit/s*

* Note that not all GPRS coding schemes and AMR channel rates are supported by each base station manufacturer.

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] (21) 5109 5128
Fax: [+86] (21) 5150 6112

CHINA Shenzhen

Tel: [+86] (755) 3301 9358
Tel: [+86] (755) 3301 9356

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 89 99641 0
Fax: [+49] 89 99641 160

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 [4] 115 4501
Fax: [+91] 80 [4] 115 4502

JAPAN

Tel: [+81] (3) 3500 5591
Fax: [+81] (3) 3500 5592

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SINGAPORE

Tel: [+65] 6873 0991
Fax: [+65] 6873 0992

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2011.

www.aeroflex.com
info-test@aeroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.