

Silicon Switching Diode Series

1N4531




Features

- Available in JAN, JANTX, and JANTXV per MIL-PRF-19500/116
- Metallurgically Bonded
- Hermetically Sealed
- Double Plug Construction

Maximum Ratings @ 25°C

Operating & Storage Temperature: -65°C to +175°C
 Surge Current A, sine 8.3ms: 2.0 A
 Surge Current B, square 8.3ms: 0.704 A
 Operating Current: 200mA, $T_A = +75^\circ\text{C}$
 Derating Factor: 2.0 mA/°C above $T_A = +25^\circ\text{C}$
 D.C. Reverse Voltage (VRWM): 75V



DC Electrical Characteristics


V_F				I_R				V_{BR}			
Ambient (°C)	I_F mA	Minimum V	Maximum V	Ambient (°C)	V (dc)	Minimum A	Maximum A	Ambient (°C)	I_R μA	Minimum V	Maximum V
25	10	---	0.8	25	20	---	0.025	25	100	100	25
25	100	---	1.2	25	75	---	0.500				
150	10	---	0.8	150	20	---	35.0				
-55	100	---	1.3	150	75	---	75.0				

AC Electrical Characteristics @ 25°C

	Symbol	Maximum	Maximum
Capacitance @ 0V	pF	---	4
Capacitance @ 1.5V	pF	---	2.8
TRR @ $I_F = I_R = 10\text{mA}$, $I_{Rec} = 1\text{mA}$.	nsec	---	5
TFR @ $I_F = 50\text{mA}$	nsec	---	20
VFR @ $I_F = 50\text{mA}$	V(pk)	---	5



Outline Drawing

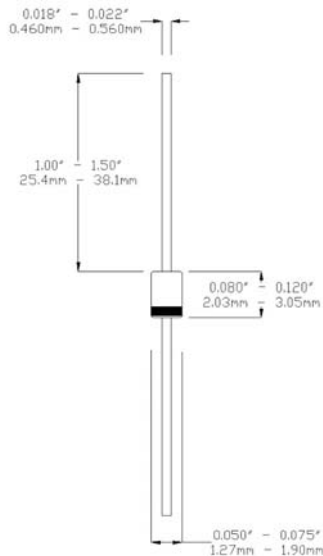

LEADED DESIGN DATA

CASE: Hermetically sealed glass case per MIL-S-19500/116, DO – 34

LEAD MATERIAL: Copper clad steel

LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: ($R_{\theta JL}$): 250 °C/W maximum at L = 0.375 in

THERMAL IMPEDANCE: ($Z_{\theta JX}$): 70 °C/W maximum

POLARITY: Cathode end is banded.

Aeroflex / Metelics, Inc.

975 Stewart Drive,
Sunnyvale, CA 94085

Tel: (408) 737-8181

Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

Hi-Rel Components

9 Hampshire Street,
Lawrence, MA 01840

Tel: (603) 641-3800

Fax: (978) 683-3264

www.aeroflex.com/metelics-hirelcomponents

www.aeroflex.com/metelics metelics-sales@aeroflex.com

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2009 Aeroflex / Metelics. All rights reserved.

ISO 9001: 2008 certified companies



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.