

Broadband Standard Product PA022023-38 GaN High Efficiency Power Amplifier 6 Watts from 2.2GHz to 2.3GHz

February 9, 2009

www.aeroflex.com/bband



DESCRIPTION

The PA022023-38 is a Narrow band high efficiency power amplifier and is ideal for use as a stable IF Amplifier, wireless, point-to-point radios or high Power Amplifier for commercial, military or space applications.

Our team of engineers can custom design power amplifiers using the latest simulation software and proprietary technology to meet even the most demanding specifications.

FEATURES

- 2.2GHz to 2.3GHz Frequency Range
- $P_{SAT} > 38\text{dBm}$
- 37.5dB typical Gain_{SAT}
- Operates from a Single +28V Supply
- Unconditionally Stable
- Hermetic Package Available

SPECIFICATIONS

ABSOLUTE MAXIMUM RATINGS¹

PARAMETER	SYMBOL	MIN	MAX	UNITS
Operating Temperature – Case	T_{MO}	-55	+95	°C
Storage Temperature – Case	T_{MS}	-65	+125	°C
Positive Supply Voltage	V_{PS}	-	+32	V

1. Stresses above those listed under "Absolute Maximums Rating" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

NOMINAL OPERATING CONDITIONS

PARAMETER	CONDITIONS	MIN	MAX	UNITS
Temperature, T_C – Case	Full Range	-55	+85	°C
Positive Supply Voltage, V_{PS}		+27.75	+28.5	V


Aeroflex Plainview

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS @ +25°C


PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Frequency Range		2.2	-	2.3	GHz
Power Output	PSAT	-	+38	-	dBm
Gain _{SAT}		-	37.5	-	dB
RF Input Impedance	Reference to 50 ohms	-	2.0:1	-	-
RF Output Impedance	Reference to 50 ohms	-	1.6:1	-	-
OIP3		-	46	-	dBm
Positive Supply Voltage		-	+28	-	V
Positive Supply Current		-	580	-	mA
Spurious Emissions Power Level		-	70	-	dBc
Efficiency		35	-	-	%

TYPICAL OUTPUT POWER, GAIN SAT AND FLATNESS

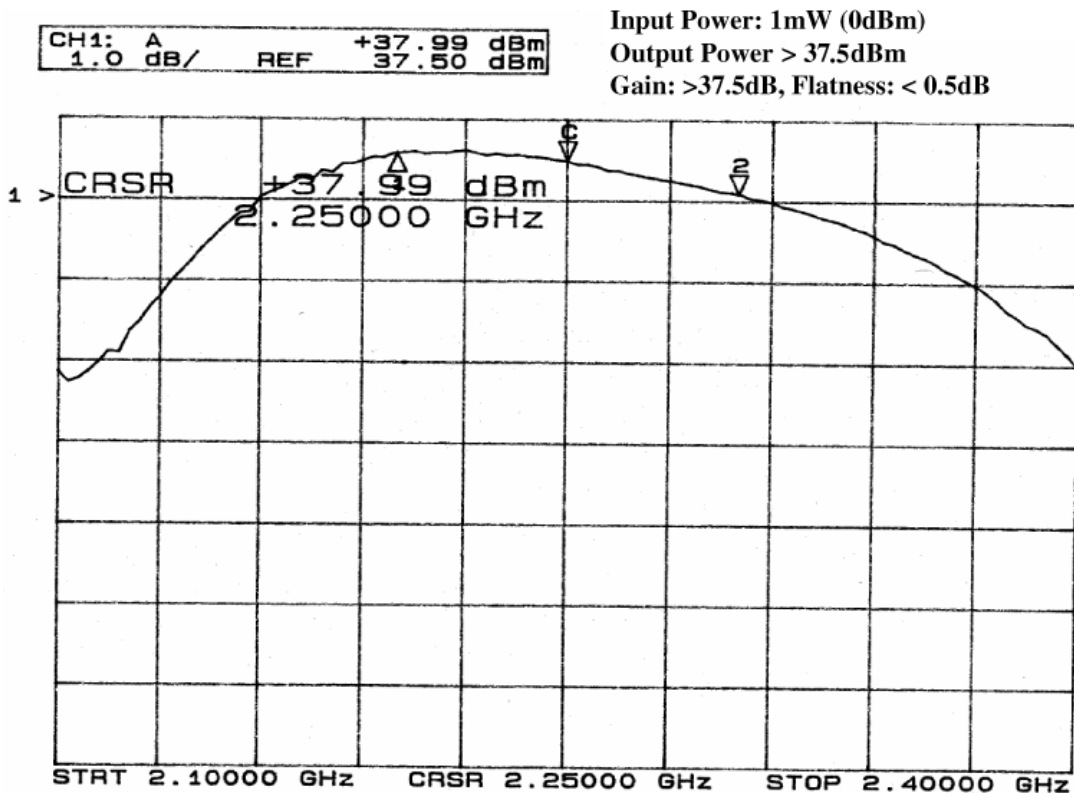

TYPICAL INPUT RETURN LOSS

CH4 LOG 10 dB/ REF 0 dB
S22 3:-11.126 dB 2 250.000 000 MHz

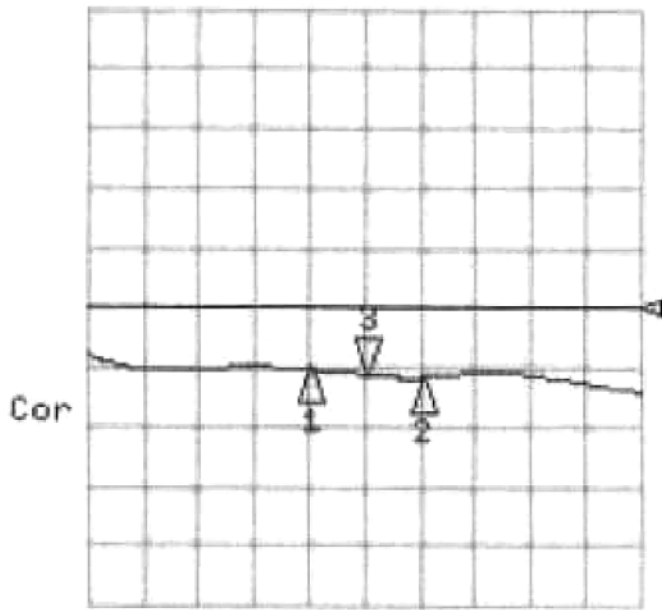

CH4 Markers


1:-10.320 dB
2.20000 GHz

2:-11.592 dB
2.30000 GHz

START 2000.000 MHz STOP 2500.000 MHz

TYPICAL OUTPUT RETURN LOSS

CH1 LOG 10 dB/ REF 0 dB
S11 3:-23.341 dB 2 250.000 000 MHz

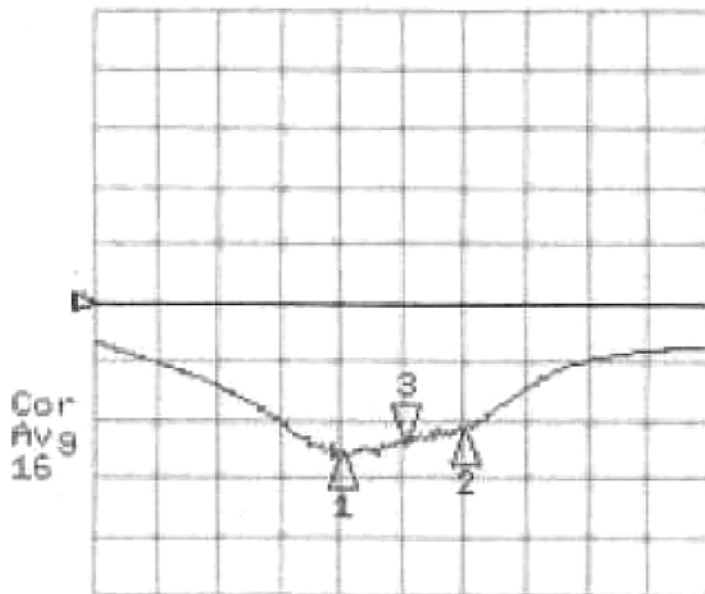


CH1 Markers

1:-25.789 dB
2.20000 GHz

2:-22.129 dB
2.30000 GHz

START 2000.000 MHz STOP 2500.000 MHz


TYPICAL SPURIOUS EMISSIONS POWER LEVEL

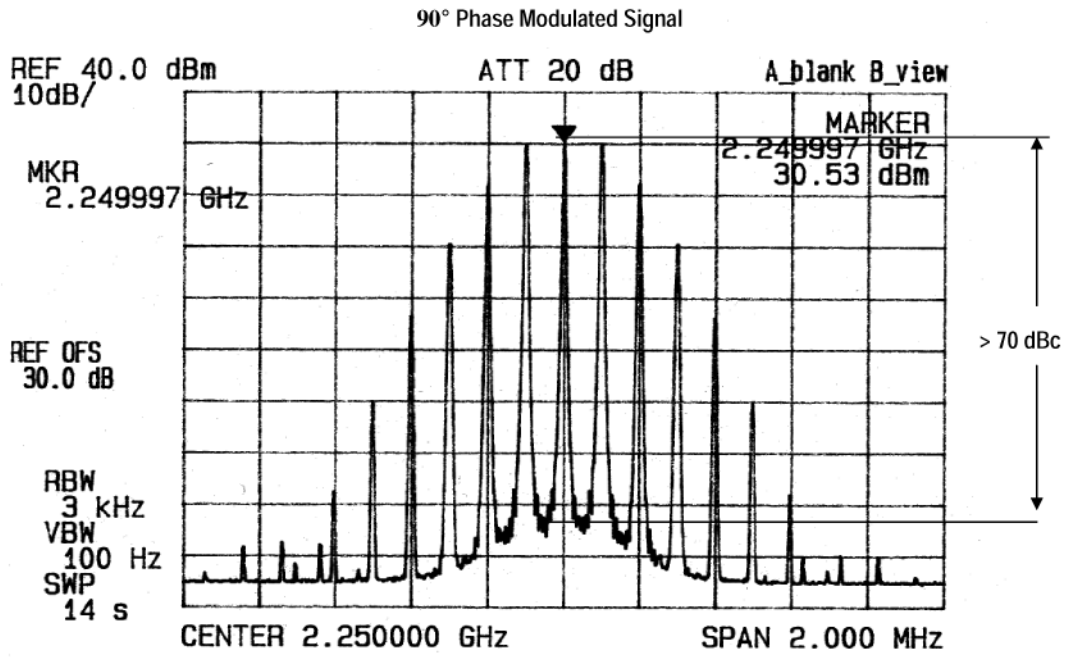

9-PIN JACK SUB-D PINOUTS vs. FUNCTIONS

PIN	FUNCTION	PIN	FUNCTION	PIN	FUNCTION
1	NC	4	NC	7	NC
2	NC	5	GND	8	+28V
3	NC	6	GND	9	+28V

OUTLINE DRAWING

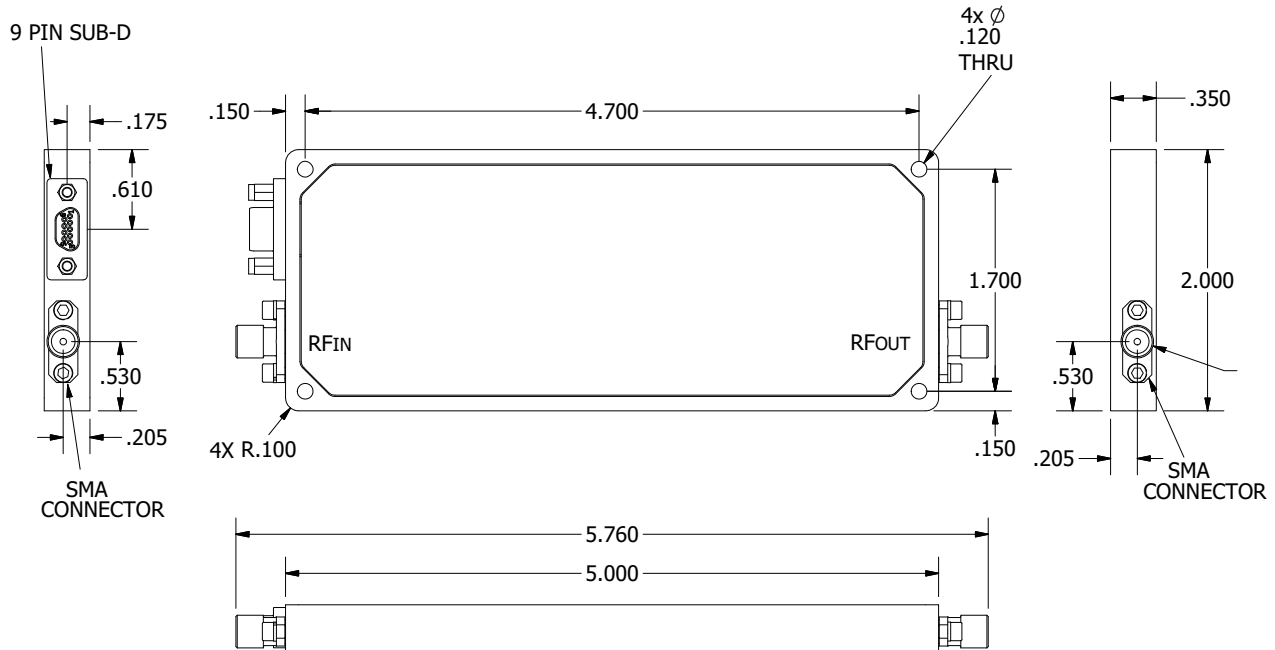

ORDERING INFORMATION

MODEL NUMBER	HERMETICITY	PACKAGE
PA022023-38	Non-Hermetic	5.0"L x 2.0"W x .35"Ht
PA022023-38-H	Hermetic	

PLAINVIEW, NEW YORK
 Toll Free: 800-THE-1553
 Fax: 516-694-6715

INTERNATIONAL
 Tel: 805-778-9229
 Fax: 805-778-1980

NORTHEAST
 Tel: 603-888-3975
 Fax: 603-888-4585

SE AND MID-ATLANTIC
 Tel: 321-951-4164
 Fax: 321-951-4254

WEST COAST
 Tel: 949-362-2260
 Fax: 949-362-2266

CENTRAL
 Tel: 719-594-8017
 Fax: 719-594-8468



www.aeroflex.com info-ams@aeroflex.com

Aeroflex Microelectronic Solutions reserves the right to change at any time without notice the specifications, design, function, or form of its products described herein. All parameters must be validated for each customer's application by engineering. No liability is assumed as a result of use of this product. No patent licenses are implied.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused